
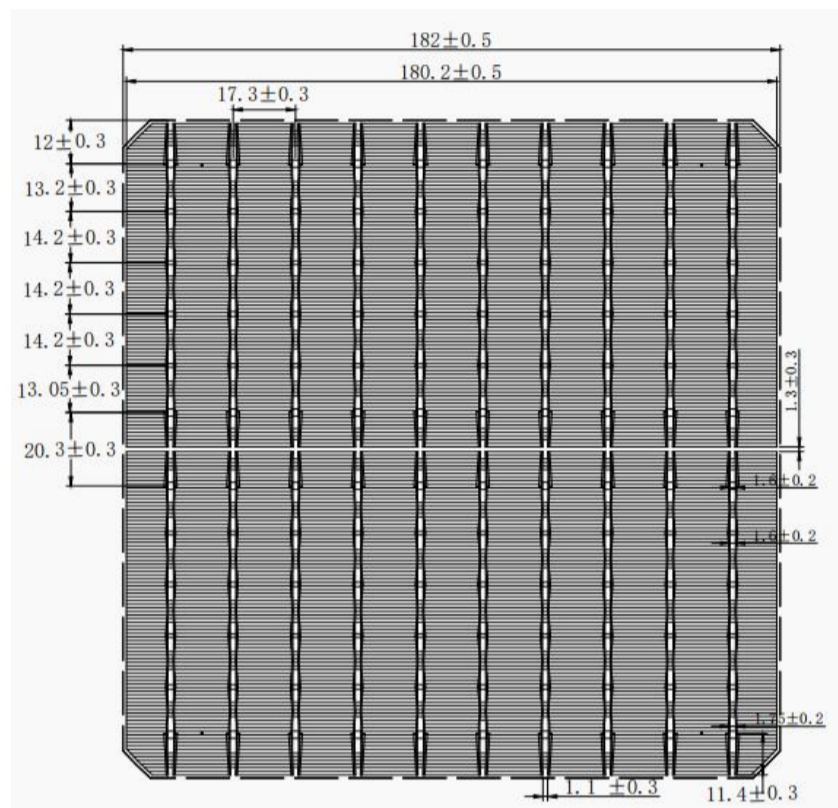


## 182mm Mono Perc 10BB Cell (Half Cut Pattern)

### 10BB 圆角单晶 PERC 电池片 (半片)

#### Product Specification/ 产品规格

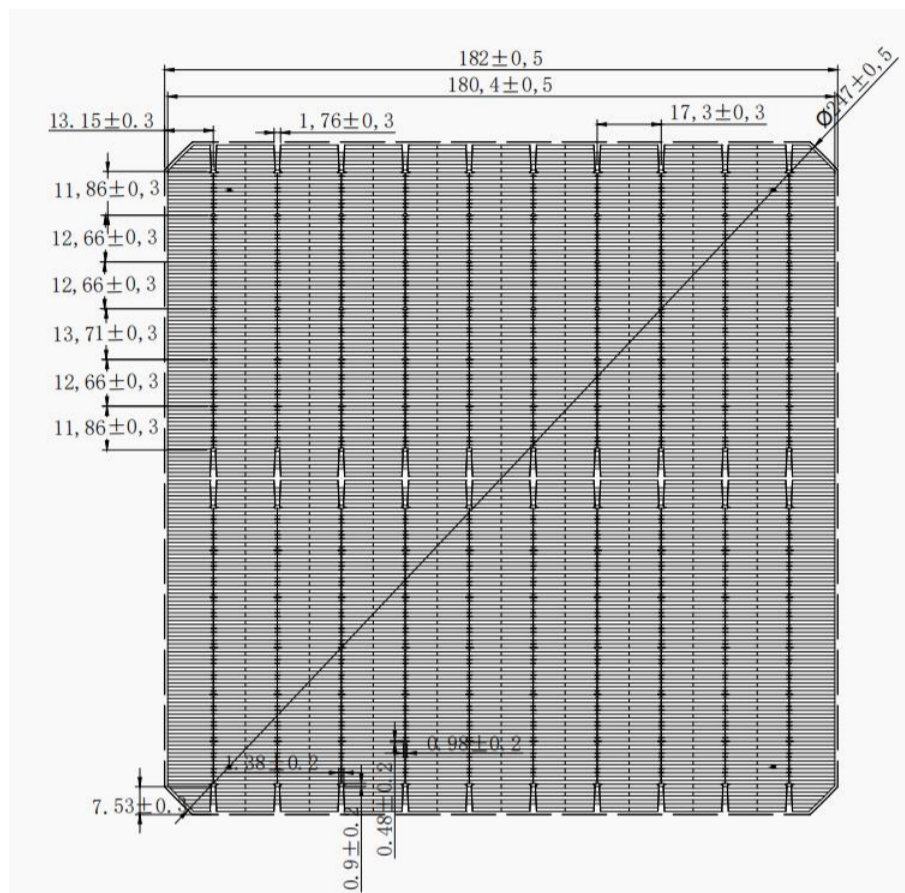

#### Size/尺寸规格

182\*182±0.5mm ,  $\varnothing$ 247±0.5mm

Thickness/厚度 : 150±20 $\mu$ m

#### Front electrode pattern (-) /正面电极图形

Ten busbars size/ 主栅尺寸 :

10\*0.05±0.03mm

Finger ( Ag ) /细栅线 : 172lines

#### Back electrode pattern (+) /背面电极图形

Finger ( Al ) /细栅线 :

180lines

背电极宽度 : 1.6±0.2mm

#### Electrical properties/电特性

#### Temperature coefficient /温度系数

TkVoltage: -0.36%/K

TkCurrent: +0.07%/K

TkPower : -0.38%/K



## Electrical performance/电性能

Eff/档位	Pm/功率 (W)	Vm/最佳工作电压 (V)	Im /最佳工作电流 (A)	Voc/开路电压 (V)	Isc/短路电流 (A)
23.5%	7.76	0.592	13.133	0.690	13.767
23.4%	7.73	0.591	13.106	0.688	13.742
23.3%	7.69	0.590	13.074	0.687	13.712
23.2%	7.66	0.589	13.035	0.686	13.675
23.1%	7.63	0.588	12.996	0.685	13.637
23.0%	7.59	0.587	12.958	0.684	13.600
22.9%	7.56	0.586	12.924	0.683	13.568
22.8%	7.53	0.585	12.890	0.682	13.536
22.7%	7.49	0.584	12.859	0.681	13.508
22.6%	7.46	0.583	12.829	0.680	13.482
22.3%	7.36	0.579	12.754	0.677	13.423
22.0%	7.26	0.573	12.710	0.673	13.396
21.3%	7.03	0.565	12.650	0.676	13.300

STC/标准测试条件：1000W/m<sup>2</sup>，AM 1.5，25°C